

# Blowdown Vessels

## Specification Sheet

### Blowdown Vessels


PM60 Compliant &  
 CE Marked

**Design Pressure:**  
 7.00 BAR G (102 PSI G)


**Design Code:**  
 PD5500, CAT 3, 2000

**Design Temperature:**  
 0 to 171 deg. 'C' (340 deg. F)

**Certification:**  
 Lloyds Register Certification  
 supplied for each vessel.

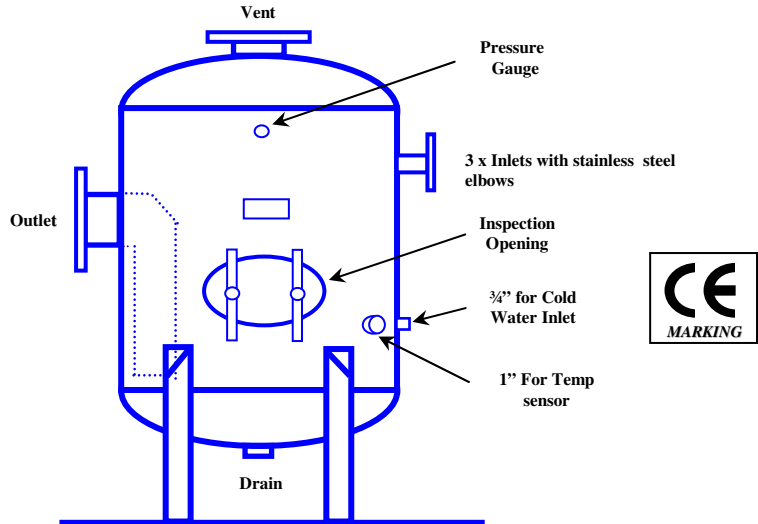

Part No.	O'all Height	Shell Size Dia x Lgth	Vol Ltr's	PN16 Connections			No. Legs	Approx. Weight Kg's
				3 Inlets	Outlet	Vent		
<b>BV2</b>	950	381 x 450	65	25	50	100	3	80
<b>BV4</b>	1200	457 x 600	120	25	50	100	3	105
<b>BV6</b>	1400	508 x 750	180	25	100	100	3	130
<b>BV8</b>	1515	610 x 850	300	25	100	100	3	175
<b>BV10</b>	1535	762 x 850	480	50	100	150	3	280
<b>BV12</b>	1715	915 x 1000	810	50	150	150	3	400
<b>BV14</b>	1865	1067 x 1000	1150	50	200	200	4	510
<b>BV16</b>	1900	1220 x 1000	1550	50	200	200	4	600
<b>BV18</b>	2200	1372 x 1000	2100	50	200	200	4	820
<b>BV20</b>	2440	1525 x 1100	2800	50	200	200	4	1000
<b>BV21</b>	2740	1829 x 1100	4300	50	200	250	4	1600
<b>BV22</b>	2700	2134 x 1100	6200	50	200	250	4	220



Also.....

Manifolds, Flash Vessels, Separators, Pipework, Etc.. Etc..