


## Chilled Water Buffer Vessels

(Effective 1<sup>st</sup> September 2006)

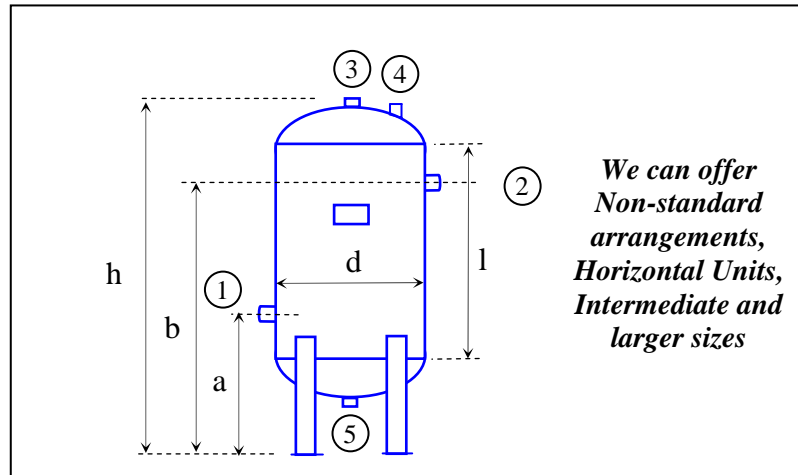

Capacity (litres)	Dimensions (mm)					Flanged PN16 Water Connections		BSP Connections		
	d	l	h	a	b	1	2	Vent 3	Spare 4	Drain 5
210	457	1200	1675	500	1400	50	50	½"	½"	½"
340	508	1500	2050	675	1575	80	80	½"	½"	½"
500	610	1500	2050	675	1575	80	80	½"	½"	½"
875	762	1700	2270	700	1800	100	100	½"	½"	½"
1000	762	2000	2570	700	2100	100	100	½"	½"	½"
1250	900	1700	2300	700	1800	100	100	¾"	¾"	¾"
1500	900	2000	2600	700	2100	150	150	¾"	¾"	¾"
2000	1067	2000	2725	775	2175	150	150	¾"	¾"	¾"
2720	1220	2000	2750	775	2175	150	150	1"	1"	1"
3320	1220	2500	3250	775	2675	200	200	1"	1"	1"
3880	1220	3000	3750	775	3175	200	200	1"	1"	1"

(We reserve the right to amend specifications without prior warning.)

- Design Codes:** BS5169:1992 – In accordance with PED and CE marked (if applicable)
- Material:** BS1501-151-Grade 430A
- Working Pressure:** 6.0 BAR G, **Design Pressure :** 6.5 BAR G, **Hyd. Test Pressure:** 9.75 BAR G
- Finish:** Inside self colour. Outside wire brushed and one coat of primer.
- Connections:** Standard arrangement shown above, size and position can be changed to suit your requirements. Prices on application.
- Capacities:** Standard sizes given above, intermediate and larger sizes are available.

**Ring Us Now On - + 44 (0) 1636 704208 with your enquiries**