


Tel: +44 (0) 1636 704208

Fax: +44 (0) 1636 705742

E-mail: sales@air-receivers.co.uk

Standard Range – Dished Ends

Effective 1st September 2006

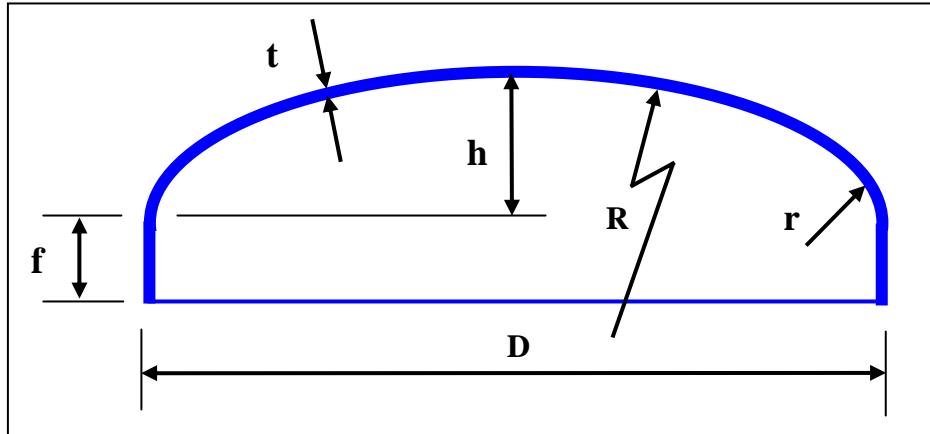

Ref. No.	Nominal. Dia		Thickness		Outside Diameter		Spherical Radius Inside		Corner Radius		Flat Flange		Height Inside		Volume (approx) (Litres)
	(in)	(mm)	(t)	(mm)	(D)	(mm)	(R)	(mm)	(r)	(mm)	(f)	(mm)	(h)	(mm)	
SE 1	8 5/8"	219	6		227		227		32		35		43		1.2
SE 3	12"	305	6		305		305		38		30		61		2.8
SE 5	15"	381	6		381		356		64		35		91		7
STDE 1	18"	457	5		457		356		46		35		102		11
STDE 2	20"	508	5		502		406		63		30		116		15
STDE 3	24"	610	6		612		508		89		40		146		28
STDE 4	30"	762	8		756		756		77		45		137		48
STDE 5	34 3/4"	883	8		885		885		89		40		168		73
STDE 6	42"	1067	8		1,052		1,000		121		35		216		133
STDE 7	42"	1067	10		1,056		1,000		121		35		216		133
STDE 8	48"	1220	10		1,220		1,200		135		30		242		198

- **Thinning:** Thickness, 't' above is before forming, thinning will occur due to the forming process.
- **Materials:** All Abbott Dished and Flanged Ends are manufactured from Boiler Quality mild steel plate Conforming to BS 1501-151-430A or equal. Material Test Certificates can be provided if required (please state at time of ordering).
- **Edge Preparation:** Edges will be as pressed. (Additional Chafe for edge preps.)
- **Centre Hole:** All of the ends have a central hole of 27 mm Diameter.
- **Dimensions:** Due to the nature of the materials and processes used, we cannot always guarantee that the dimensions will be exactly as stated, however, we will pair together matching ends on orders of two or more.

These Ends are normally available Ex Stock!
RING US NOW ON – 01636 704208 WITH YOUR ENQUIRIES