

Blowdown Vessels

Specification Sheet

Blowdown Vessels


PM60 Compliant &
 CE Marked

Design Pressure:
 7.00 BAR G (102 PSI G)


Design Code:
 PD5500, CAT 3, 2000

Design Temperature:
 0 to 171 deg. 'C' (340 deg. F)

Certification:
 Lloyds Register Certification
 supplied for each vessel.

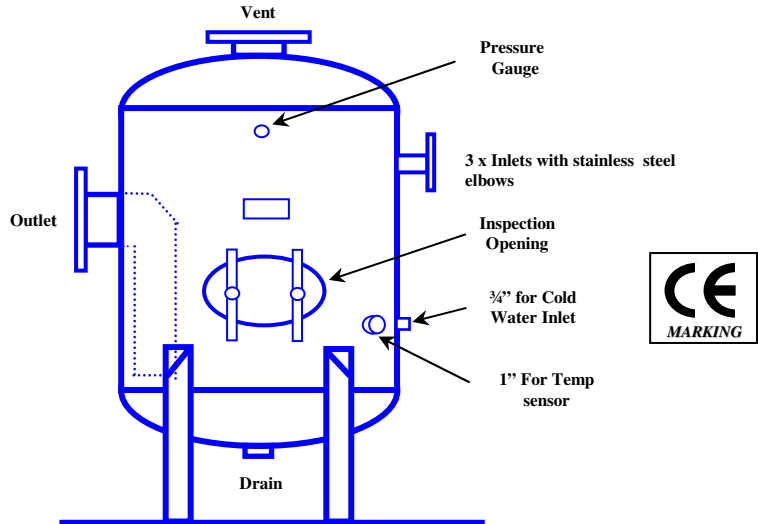

Part No.	O'all Height	Shell Size Dia x Lgth	Vol Ltr's	PN16 Connections			No. Legs	Approx. Weight Kg's
				3 Inlets	Outlet	Vent		
BV2	950	381 x 450	65	25	50	100	3	80
BV4	1200	457 x 600	120	25	50	100	3	105
BV6	1400	508 x 750	180	25	100	100	3	130
BV8	1515	610 x 850	300	25	100	100	3	175
BV10	1535	762 x 850	480	50	100	150	3	280
BV12	1715	915 x 1000	810	50	150	150	3	400
BV14	1865	1067 x 1000	1150	50	200	200	4	510
BV16	1900	1220 x 1000	1550	50	200	200	4	600
BV18	2200	1372 x 1000	2100	50	200	200	4	820
BV20	2440	1525 x 1100	2800	50	200	200	4	1000
BV21	2740	1829 x 1100	4300	50	200	250	4	1600
BV22	2700	2134 x 1100	6200	50	200	250	4	220

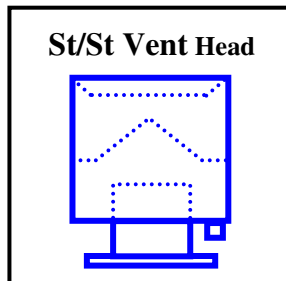

Also.....

Manifolds, Flash Vessels, Separators, Pipework, Etc.. Etc..