


Technical Specifications

Expansion Vessels

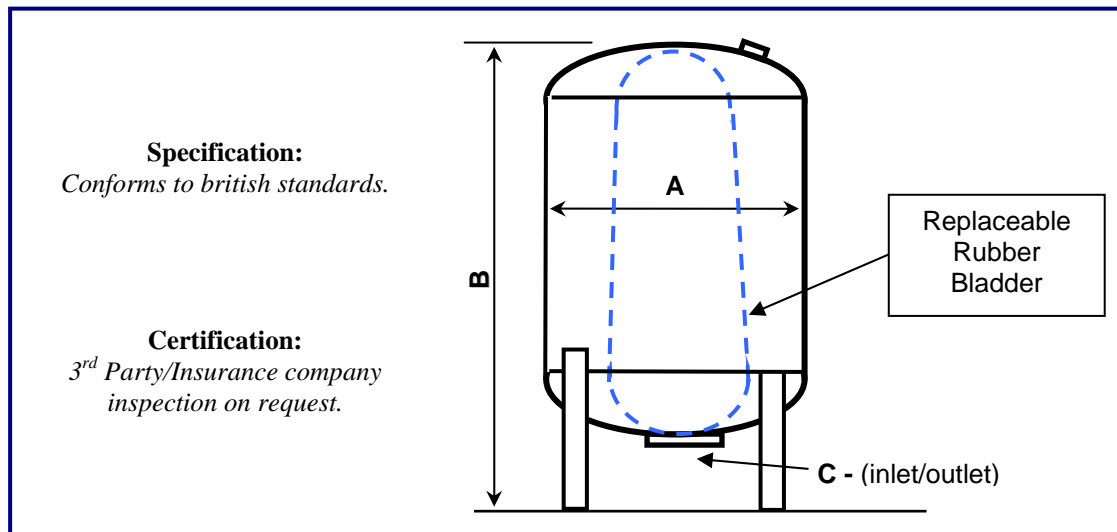

VOLUME Litres	DIMENSIONS			PRESSURE MODEL & WEIGHT			
	A	B	C	7 Bar	10 Bar	16 Bar	20 Bar
100	450	1100	1"	100/7 – 70 Kg	100/10 – 70Kg	100/16 – 75Kg	100/20 – 80Kg
200	500	1600	1"	200/7 – 124Kg	200/10 – 124Kg	200/16 – 134Kg	200/20 – 154Kg
300	610	1600	1"	300/7 – 160Kg	300/10 – 160Kg	300/16 – 235Kg	300/20 – 235Kg
400	610	2000	1"	400/7 – 185Kg	400/10 – 185Kg	400/16 – 265Kg	400/20 – 265Kg
500	760	1850	1"	500/7 – 210Kg	500/10 – 210Kg	500/16 – 295Kg	500/20 – 295Kg
600	760	2000	1"	600/7 – 230 Kg	600/10 – 230Kg	600/16 – 330Kg	600/20 – 390Kg
800	900	2300	1"	800/7 – 295 Kg	800/10 – 345Kg	800/16 – 435Kg	800/20 – 515Kg
1000	900	2450	1"	1000/7 – 385Kg	1000/10 – 475Kg	1000/16 – 585Kg	ASK ABOUT OUR
1200	1067	2200	1 ½"	1200/7 – 425Kg	1200/10 – 535Kg	1200/16 – 660Kg	
1400	900	3000	1 ½"	1400/7 – 470Kg	1400/10 – 595Kg	1400/16 – 710Kg	
1600	1070	2600	1 ½"	1600/7 – 580Kg	1600/10 – 720Kg	SPECIAL VESSELS	
2000	1220	2500	1 ½"	2000/7 – 630Kg	2000/10 – 710Kg		

All vessels are fitted with re-placeable rubber bladders, suitable for potable water at temperatures up to 100°C with acceptance levels approximately 50%.

Vessels can be built to many different design codes: PD5500, BS5169, Lloyds 2/2 etc...

Finished in exterior quality enamel gloss paint (primer on request) – or to your own specification inside and out.

Lifting eyes are provided for convenience.

We are pleased to make special vessels to customers specific requirements and also to higher pressure ratings.

PLEASE RING NOW ON - 01636 704208 WITH ANY ENQUIRIES